



Attorney Docket No.: 6770P007

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re Patent Application of:)
Thomas Man Yin Ying, et al.)
Application No.: 10/742,150)
Filed: December 18, 2003)
For: METHOD AND APPARATUS FOR)
RECOVERING A REFERENCE)
CLOCK)

Examiner:

Art Unit: 2664

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

EXPRESS MAIL STATEMENT

"Express Mail" mailing label number: EV336587250US
Date of Deposit: September 2, 2004

I hereby state that I am causing this paper or fee to be deposited with the United States Postal Service "Express Mail Post Office to Addressee" service on the date indicated above and that this paper or fee has been addressed to the Commissioner of Patents, P.O. Box 1450, Alexandria, VA 22313-1450

Christopher P. Marshall

(Type or printed name of person mailing paper or fee)

(Signature of person mailing paper or fee)

(Date Signed)

9/2/2004

SUBMISSION OF CERTIFIED COPY OF PRIORITY DOCUMENT

Sir:

Applicants hereby enclose a certified copy of the priority document for the above-referenced patent application. The enclosed document is a certified copy of British Application No. GB 02296448.1, filed December 19, 2002.

If there are any charges not covered by any check submitted, please charge Deposit Account No. 02-2666.

Respectfully submitted,

BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP

Dated: September 2, 2004

Lester J. Vincent
Registration No. 31,460

12400 Wilshire Boulevard
Seventh Floor
Los Angeles, CA 90025
(408) 720-8300

THIS PAGE BLANK (USPTO)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 2006 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., p.l.c. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Stephen Hordley

Dated

11 November 2003

CERTIFIED COPY OF
ORIGINAL DOCUMENT

THIS PAGE BLANK (USPTO)

19 DEC 2002
RULE 97
NEWPORT

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference	JSR.P52407GB		
2. Patent application number (The Patent Office will fill in this part)	0229648.1		19 DEC 2002
3. Full name, address and postcode of the or of each applicant (underline all surnames)	Zarlink Semiconductor Limited Cheney Manor Swindon Wiltshire SN2 2QW 8177974001 Britain		
Patents ADP number (if you know it)			
If the applicant is a corporate body, give the country/state of its incorporation			
4. Title of the invention	Method of and Apparatus for Recovering a Reference Clock		
5. Name of your agent (if you have one)	Marks & Clerk		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	4220 Nash Court Oxford Business Park South Oxford OX4 2RU United Kingdom 7271125001		
Patents ADP number (if you know it)			
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application.	Number of earlier application	Date of filing (day / month / year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:	Yes		
a) any applicant named in part 3 is not an inventor, or			
b) there is an inventor who is not named as an applicant, or			
c) any named applicant is a corporate body.			
See note (d))			

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	0
Description	9
Claim(s)	2
Abstract	1
Drawing(s)	3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature _____ Date _____

Marks & Clerk _____ 18 December 2002

12. Name and daytime telephone number of person to contact in the United Kingdom John S. Robinson - 01865 397900

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

METHOD OF AND APPARATUS FOR RECOVERING A REFERENCE CLOCK

The present invention relates to a method of and an apparatus for recovering a reference clock. For example, such a method and apparatus may be used in the emulation of a time division multiplexed (TDM) circuit across a packet network, such as an Ethernet, an ATM network or an IP network.

Figure 1 of the accompanying drawings illustrates a known circuit emulation arrangement used to support the provision of leased line services to customers using legacy TDM equipment. The service is provided between a first customer premises 1 and a second customer premises 2 and the connection is provided via a packet switched carrier network 3.

The premises 1 is the transmitting or sending end of the connection and comprises an apparatus 4 which contains a circuit 5 controlled by a "master" clock 6. The circuit 5 receives customer data for transmission and organises this as a TDM transmission to the network 3.

The TDM link is a synchronous circuit with a constant bit rate governed by the service clock frequency f_{service} of the master clock 6. The TDM link is connected to an arrangement 7 of the network 3 performing a provider edge interworking function. In particular, the circuit 7 converts the TDM data to data packets such as 8 and the packets are transmitted across the network 3 in accordance with the protocol of the network.

A further apparatus 9 is provided at the receiving end of the network to perform conversion of the packets to a TDM link for the premises 2. The regenerated TDM signals are then supplied to an apparatus 10 comprising an arrangement 11 for recovering the customer data controlled by a clock extraction circuit 12 supplying clock signals f_{regen} , which are required to reproduce exactly the service clock frequency f_{service} .

The apparatus 9 comprises a queue 13 which receives and queues the packets received over the packet switched network. A clock 14 supplies a clock signal at a frequency f_{regen} to a circuit 15, which effectively controls the reconstituting of the TDM signals.

In order for such an arrangement to operate correctly, it is essential for the regenerated clock frequency to match the master clock frequency in the apparatus 4. However, packet switched networks have no synchronisation between nodes so that the connection between the TDM ingress and egress frequencies is broken. The consequence of any long-term mismatch in frequency is that the queue 13 will fill up or empty depending on whether the regenerated clock is slower or faster than the master clock. This results in loss of data and degradation of the service.

The concept of adaptive clock recovery is known, for example from Circuit Emulation Services (CES) over ATM, ITU standard I.36.1 and ATM Forum standard AFVTOA-0078. However, details of actual techniques are not disclosed in these documents.

According to a first aspect of the invention, there is provided an apparatus for recovering a reference clock, generated by a master clock in a sender, from items of timing information sent by the sender over a network to the apparatus, comprising a controllable slave clock and a control circuit for determining each r th frequency drift between the frequencies of the master clock and the slave clock as a function of $(r \times m \times N) - C'_a(n + r \times m)$, where

$$C'_a(n) = \left(\sum_{i=0}^{q-1} C'(n-i) \right) / q$$

N is the number of cycles of the master clock between the sending of consecutive timing information items, $C'(s)$ is the number of slave clock cycles between receipt of the $(s-rm)$ th and s th timing information items from the network, m is an integer greater than zero, q is an integer greater than one, and r is a non-negative integer representing the order of the drift determinations, and for controlling the slave clock so as to reduce the error.

The network may be a non-synchronous network, such as a packet switching network with each timing information item being a packet.

q may be less than or equal to m .

The slave clock may be a voltage controlled oscillator.

The control circuit may be arranged to adjust the frequency of the slave clock after each drift determination by:

$$x[(r \times m \times N) - C'_a(n + r \times m)]$$

where x is a parameter determining the rate of drift compensation.

According to a second aspect of the invention, there is provided a method of recovering a reference clock, generated by a master clock in a sender, from items of timing information sent by the sender over a network, comprising: determining each r th frequency drift between the frequencies of the master clock and a slave clock as a function of $(r \times m \times N) - C'_a(n + r \times m)$, where

$$C'_a(n) = \left(\sum_{i=0}^{q-1} C'(n-i) \right) / q$$

N is the number of cycles of the master clock between the sending of consecutive timing information items, $C'(s)$ is the number of slave clock cycles between receipt of the $(s-rm)$ th and s th timing information items from the network, m is an integer greater than zero, q is an integer greater than one; and r is a non-negative integer representing the order of the drift determination; and controlling a slave clock so as to reduce the error.

It is thus possible to provide a technique which allows accurate reference clock recovery across a network such as a packet switched network. In particular, such a technique provides compensation for long term frequency drift of a master clock and/or a slave clock. Thus, such a network may be used as part of a synchronous link which eliminates or substantially reduces data loss.

The invention will be further described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a block schematic diagram of a known arrangement for providing a TDM leased line service across a packet switched network;

Figure 2 is a block schematic diagram illustrating a method of and an apparatus for providing adaptive clock recovery constituting an embodiment of the invention;

Figure 3 illustrates the timing of generation and processing of a CES timing packet;

Figure 4 illustrates a moving gate measurement process; and

Figure 5 illustrates an accumulative moving gate frequency measurement process;

Like reference numerals refer to like parts throughout the drawings.

Figure 2 illustrates an arrangement 20 at the sending end of a TDM leased line service. The arrangement 20 may be provided in the apparatus 4 at the customer premises 1 or in the arrangement 7 as part of the network 3. Figure 2 also shows an arrangement 21 at the receiving end of the leased line service. The slave unit 21 may be provided in the circuit 9 of the network or in the apparatus 10 at the receiving premises 2.

The master unit 20 comprises a master reference oscillator 22 which forms a master clock supplying clock signals at a frequency f_m . The clock signals are supplied to a

counter 23 which divides the clock frequency by an integer and controls the generation of CES timing packets in a generator 24. In particular, for every N cycles of the master reference clock, the generator 24 generates and sends a CES timing packet to the slave unit 21 via the packet network 3.

The received timing packets are supplied to a clock recovery control block 25 in the slave unit 21. The output of the block 25 is supplied to a digital-analog converter (DAC) 26, which supplies a control voltage to a voltage controlled oscillator 27 acting as the slave clock whose frequency f_s is to be synchronised to the master clock frequency f_m . The output of the oscillator 27 is supplied to a counter 28, which supplies a “tick” count to the block 25.

The slave unit performs a packet receive event for every CES timing packet received and records the current value of the tick count driven by the voltage controlled oscillator 27. The accumulated voltage controlled clock tick recorded for the n th CES timing packet, P_n , is referred as $c(n)$. Figure 3 shows the timing of the generation and processing of the CES timing packet by the master and slave units 20 and 21.

When the n th CES timing packet, P_n , is received by the slave unit 21 and the number of CES timing packets received is more than m since the adaptive clock system was initialised, the accumulated voltage controlled clock ticks between the arrival times of P_n and $P_{(n-m)}$ is equal to:

$$C(n) = c(n) - c(n - m) \quad (1)$$

By taking into account the system operation latency variations and network latency variations under real operation conditions, $C(n)$ can be expressed as:

$$C(n) = (m \times N) + \Delta D_{sys}(n) + \Delta D_{net}(n) - E_c(n) \quad (2)$$

where:

$(m \times N)$ is the number of master reference clock cycles or ticks between the transmission times of P_n and $P_{(n-m)}$,

$$\Delta D_{sys}(n) = D_{sys}(n) - D_{sys}(n-m) = [D_{tx}(n) + D_{rx}(n)] - [D_{tx}(n-m) + D_{rx}(n-m)],$$

which is the variation in voltage controlled clock ticks caused by any system operation latency including time variations for transmitting and receiving network packets,

$$\Delta D_{net}(n) = D_{net}(n) - D_{net}(n - m),$$

which is the variation in voltage controlled clock ticks caused by any packet traffic latency present in the network, and

$E_c(n)$ is the frequency error in voltage controlled clock ticks corresponding to the frequency differences between the master reference clock and the voltage controlled clock.

Figure 4 illustrates the concept of a moving gate measurement. An average voltage controlled clock tick count for q consecutive moving gate measurements, $C_a(n)$, is calculated as follows:

$$C_a(n) = \left(\frac{\sum_{i=0}^{q-1} C(n-i)}{q} \right) \quad (3)$$

$$C_a(n) = \left(\frac{\sum_{i=0}^{q-1} [(m \times N) + \Delta D_{sys}(n-i) + \Delta D_{net}(n-i) - E_c(n-i)]}{q} \right) \quad (4)$$

Each $C(n)$ is determined from the arrival times of two CES timing packets, P_n and P_{n-m} . The packet arrival time information of any CES timing packet should not be used more than once in the calculation of $C_a(n)$. Otherwise, duplicated timing information is included in the average calculation and can lead to a less accurate result. This can be avoided by setting q to less than or equal to m .

The variation of the frequency differences between the master reference clock and the voltage controlled clock is insignificant over the measurement period of $C_a(n)$, thus, $E_c(n) = E_c(n-1) = E_c(n-2)$ and so on. Therefore, $C_a(n)$ can be re-expressed as follows:

$$C_a(n) = \left((m \times N) - E_c(n) + \frac{\sum_{i=0}^{q-1} \Delta D_{sys}(n-i)}{q} + \frac{\sum_{i=0}^{q-1} \Delta D_{net}(n-i)}{q} \right) \quad (5)$$

Both system operation latency variations and network latency variations for the specific CES timing packet size are random. If sufficient timing samples are collected, then:

$$\frac{\sum_{i=0}^{q-1} \Delta D_{sys}(n-i)}{q} \rightarrow 0$$

$$\frac{\sum_{i=0}^{q-1} \Delta D_{net}(n-i)}{q} \rightarrow 0$$

Hence,

$$C_a(n) \cong (m \times N) - E_c(n) \quad (6)$$

$$E_c(n) \cong (m \times N) - C_a(n) \quad (7)$$

Both $\Delta D_{sys}(n)$ and $\Delta D_{net}(n)$ are independent of m , N and q . This means that the greater the values of variables m , N and q are set to, the better the frequency measurement results which will be produced.

Figure 5 illustrates the concept of accumulative moving gate measurements. The start of each gate $P_{(n)}$, $P_{(n+1)}$, $P_{(n+2)}$..., is fixed whereas the end of gate is extended by m packet arrivals between each pair of consecutive measurements.

Using equations (3) and (6):

$$C'_a(n) = \left(\frac{\sum_{i=0}^{q-1} C'_a(n-i)}{q} \right) \quad (8)$$

For a first measurement, $C'_a(n) \equiv (m \times N) - E'_c(n)$.

For a second measurement, $C'_a(n+m) \equiv (2m \times N) - E'_c(n+m)$.

For a third measurement, $C'_a(n+2m) \equiv (3m \times N) - E'_c(n+2m)$.

For an r th measurement, $C'_a(n+r \times m) \equiv (r \times m \times N) - E'_c(n+(r-1) \times m)$.

where $E'_c(n)$ is the accumulative average voltage controlled clock error count measured at the arrival of packet n since the start of the accumulative moving gate. Long term error or frequency drift is compensated by correcting the slave clock frequency on the basis of these error values.

The accumulative moving gate technique is designed to compensate long-term clock drift and should be used in conjunction with another clock recovery algorithm which can handle short-term clock drift, such as the technique disclosed in British patent application No. 0218103.0, the contents of which are incorporated herein by reference.

The accumulative moving gate may be activated after the short-term clock recovery algorithm has achieved a reasonable accuracy. This means that, at the first measurement:

$$C'_a(n) \equiv (m \times N) - E'_c(n) \text{ where } E'_c(n) \equiv 0 \text{ or is within an acceptable range.}$$

At the r th measurement, $C'_a(n+r \times m) \equiv (r \times m \times N) - E'_c(n+(r-1) \times m)$, where $E'_c(n+(r-1) \times m)$ is a measure of long-term clock drift over $(r \times m)$ master packet periods.

In an illustrative example of this technique, the master clock frequency $f_m = 2048000\text{Hz}$. The master unit 20 sends one CES timing packet to the slave unit 21 every one second so that $N = 2048000$. Also, $m = 10$, $q = 2$, and the arrival times for the 1st, 2nd, 11th and 12th packets are 2048005, 4096009, 22528055 and 24576060, respectively, so that:

$$\begin{aligned} E'_c(n) &\equiv (m \times N) - C'_a(n) \\ &= (10 \times 2048000) - (24576060 - 4096009 + 22528055 - 2048005) / 2 \\ &= -50.5 \end{aligned}$$

If the arrival times for the 21st and 22nd packets are 43008189 and 45056242, respectively, then:

$$\begin{aligned} E'_c(n+m) &\equiv (2m \times N) - C'_a(n+m) \\ &= (20 \times 2048000) - (43008189 - 4096009 + 45056242 - 2048005) / 2 \\ &= -208.5 \end{aligned}$$

The overall clock drift between the 1st and the 22nd packets is therefore -208.5 clock cycles.

If a long-term clock drift $E'_c(\tau)$ is detected at time, t , a frequency adjustment $\Delta f_{vco} = x \times E'_c(\tau)$ can be applied to compensate the clock drift. The value of x determines the rate of compensation for the detected long-term clock drift. In general, it is desirable to compensate long-term clock drift over a reasonably long period rather than introducing rapid changes that may interfere with the short-term clock recovery algorithm running in parallel. A typical frequency adjustment rate would be 5 times or more slower than the short-term clock recovery algorithm.

When using the present technique, it is possible to switch off the short-term clock recovery algorithm running in parallel once the master and slave clocks are converged. This is, however, only possible if the master clock has very slow drift characteristic and high stability.

CLAIMS:

1. An apparatus for recovering a reference clock, generated by a master clock in a sender, from items of timing information sent by the sender over a network to the apparatus, comprising a controllable slave clock and a control circuit for determining each r th frequency drift between the frequencies of the master clock and the slave clock as a function of $(r \times m \times N) - C'_a(n + r \times m)$, where

$$C'_a(n) = \left(\sum_{i=0}^{q-1} C'(n-i) \right) / q$$

N is the number of cycles of the master clock between the sending of consecutive timing information items, $C'(s)$ is the number of slave clock cycles between receipt of the $(s-rm)$ th and sth timing information items from the network, m is an integer greater than zero, q is an integer greater than one, and r is a non-negative integer representing the order of the drift determinations, and for controlling the slave clock so as to reduce the drift.

2. An apparatus as claimed in claim 1, in which the network is a non-synchronous network.
3. An apparatus as claimed in claim 2, in which the network is a packet switching network and each timing information item is a packet.
4. An apparatus as claimed in any one of the preceding claims, in which $q \leq m$.
5. An apparatus as claimed in any one of the preceding claims, in which the slave clock is a voltage controlled oscillator.
6. An apparatus as claimed in any one of the preceding claims, in which the control circuit is arranged to adjust the frequency of the slave clock after each drift determination by:

$$x[(r \times m \times N) - C'_a(n + r \times m)]$$

where x is a parameter determining a rate of drift compensation.

7. A method of recovering a reference clock, generated by a master clock in a sender, from items of timing information sent by the sender over a network, comprising: determining each r th frequency drift between the frequencies of the master clock and a slave clock as a function of $(r \times m \times N) - C'_a(n + r \times m)$, where

$$C'_a(n) = \left(\sum_{i=0}^{q-1} C'(n-i) \right) / q$$

N is the number of cycles of the master clock between the sending of consecutive timing information items, $C'(s)$ is the number of slave clock cycles between receipt of the $(s-rm)$ th and s th timing information items from the network, m is an integer greater than zero, q is an integer greater than one; and r is a non-negative integer representing the order of the drift determination; and controlling the slave clock so as to reduce the error.

ABSTRACT

~~METHOD~~ OF AND APPARATUS FOR RECOVERING A REFERENCE CLOCK

(Figure 2)

An apparatus (21) is provided for recovering a reference clock generated by a master clock (22) in a sender (20). The sender (20) sends timing packets over a network (3). The apparatus comprises a controllable slave clock (27) and a control circuit (25, 26, 28) which determines the frequency drift between the master clock and the slave clock and controls the slave clock (27) so as to reduce the drift. The error is determined as a function of $(r \times m \times N) - C'_a(n + r \times m)$,

$$\text{where } C'_a(n) = \left(\sum_{i=0}^{q-1} C'(n-i) \right) / q.$$

N is the number of cycles of the master clock between the sending of consecutive timing information items, C'(s) is the number of slave clock cycles between receipt of the (s-rm)th and sth timing information items from the network, m is an integer greater than 0, q is an integer greater than 1, and r is a non-negative integer representing the order of the drift determination.

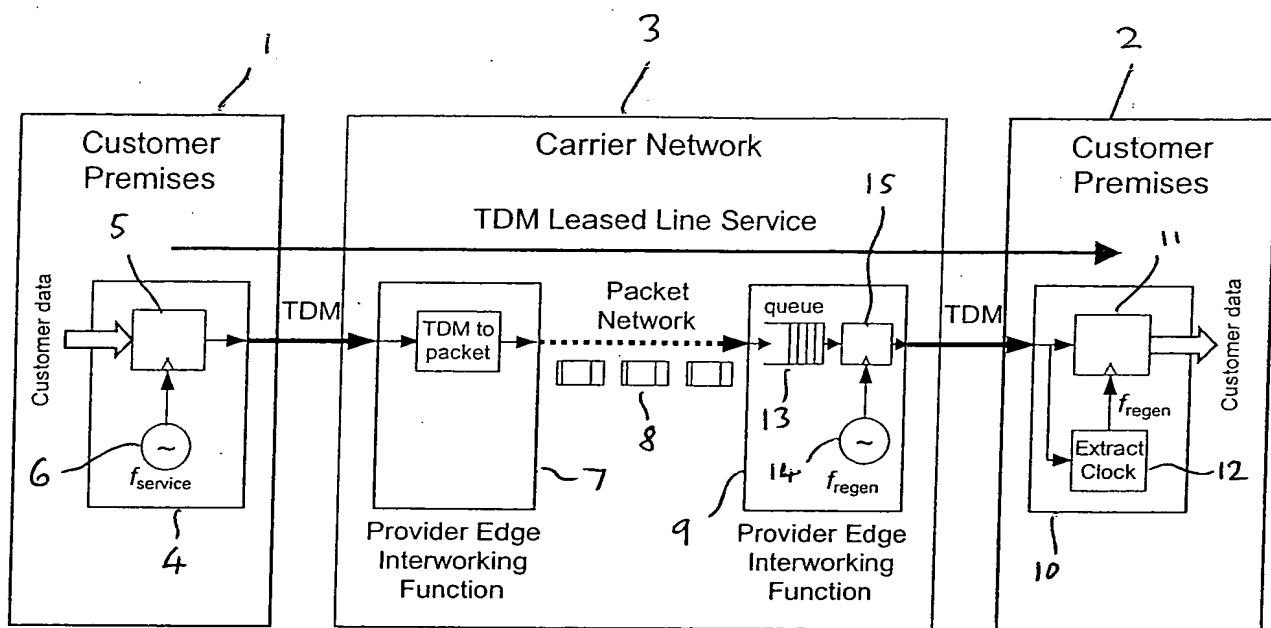


Figure 1

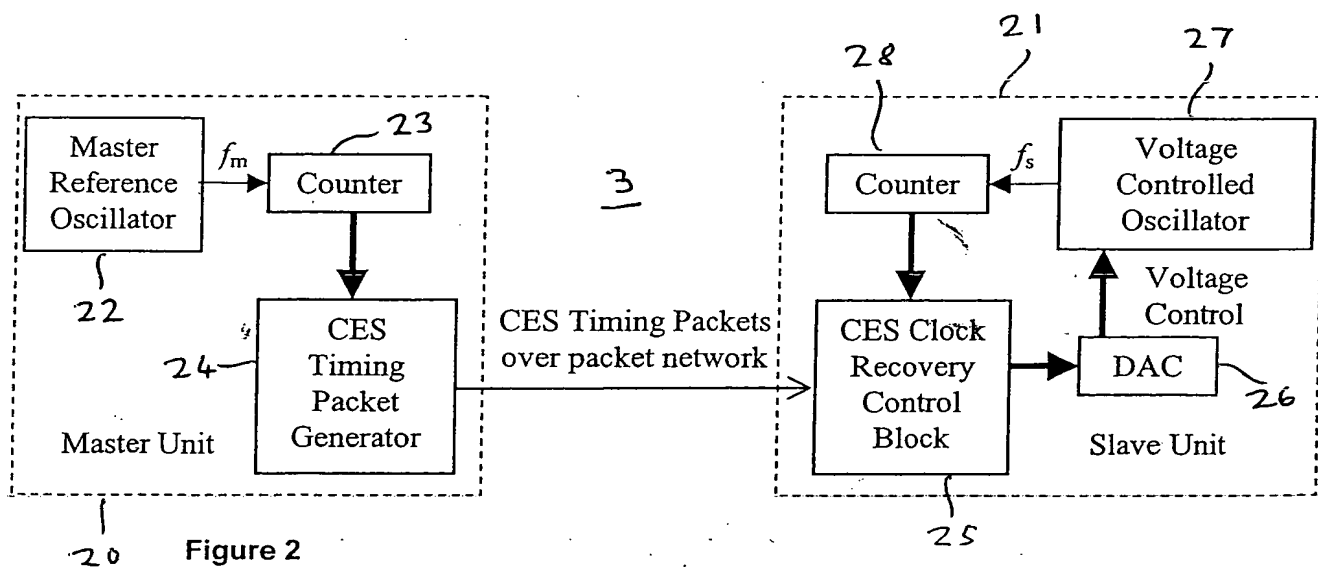


Figure 2

THIS PAGE BLANK (USPTO)

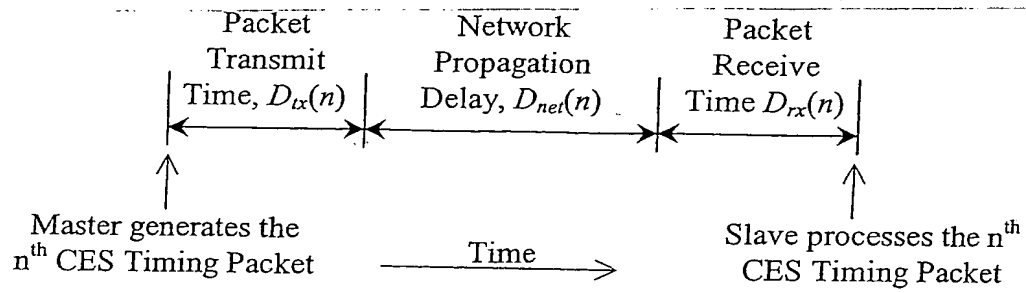


Figure 3

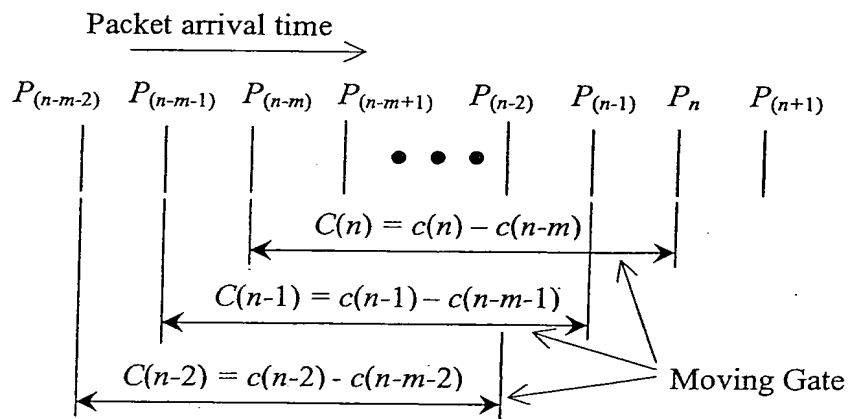


Figure 4

THIS PAGE BLANK (USPTO)

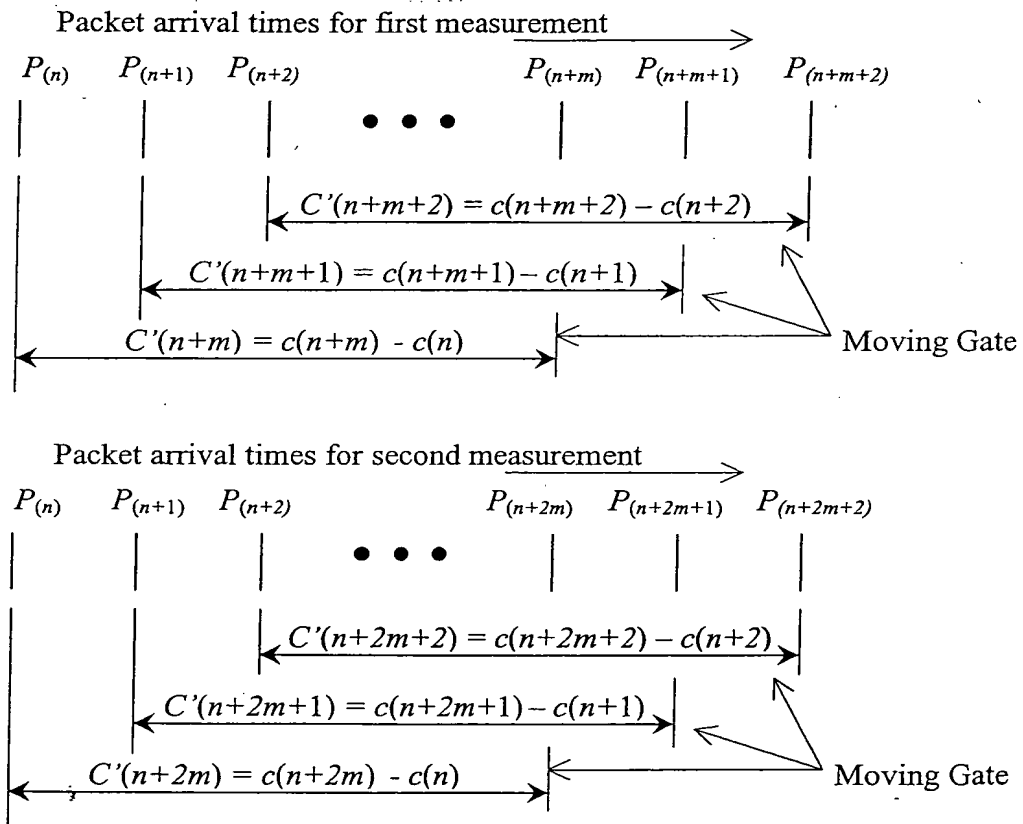


Figure 5

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

